

Wireless Color Screen Office IP Phone FIP11W




Features Keys

- Support 32 BLF
- 8 SIP Account
- 2.8 TFT Color Screen
- 2.4G Wireless(Optional)
- 10/100Mbps Ethernet, Support PoE(Optional)

Overview

FIP11W is a new generation of enterprise-class color IP phone, providing convenient communications experience to call a busy corporate office and management personnel. The built-in internal antenna make user connect the network much easier and more quickly, user can not only connect FIP11W to the network by using a ethernet cable, but also he/she can connect FIP11W to the wireless network, the performance is the same as mobile phone. User can connect the wireless network on FIP11W's LCD or on phone's webpage. FIP11W excellent HD voice quality, rich and leading edge telephony system functions

Hardware Interface

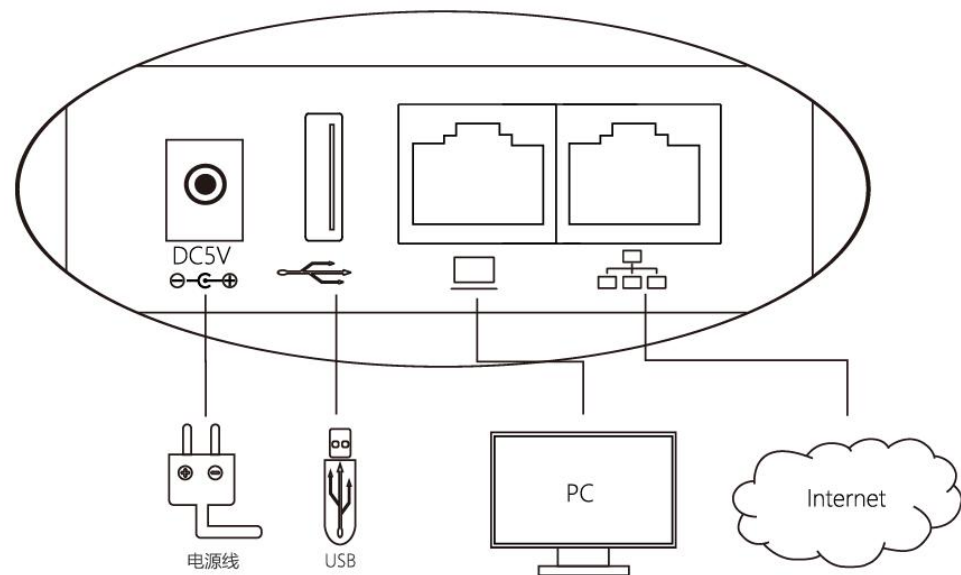

to provide users with personalized information customization, support automatic deployment, advanced security protection mechanism, compatible with a wide range of mainstream industry SIP/IMS platform.

Technical Parameters

VoIP SoC	<ul style="list-style-type: none"> • CPU:MT7628N
Flash	<ul style="list-style-type: none"> • 16MB Flash
RAM	<ul style="list-style-type: none"> • 64MB SDRAM
Power	<ul style="list-style-type: none"> • AC/DC Adapter AC Input: 100~240V, 50~60Hz DC Output: 5V, 1A
Operating System	<ul style="list-style-type: none"> • Linux 2. 6. 36
I/O Interfaces	<ul style="list-style-type: none"> • Support PoE(Optional) • 1xRJ9 Handle • 1xRJ9 Earphone Jack • 2xRJ45 Ports (Ethernet 10/100 Base-T) • Support Wireless, 2T2R, 802. 11n(Optional) • 1xUSB 2. 0
Environmental	<ul style="list-style-type: none"> • Operation Temperature: 0~50 Degree C • Storage Temperature: -25~ 85 Degree C • Relative Humidity: 10%~90% No Condensing
Audio Feature	<ul style="list-style-type: none"> • G. 711 (A/u) • G. 722 (HD) • G. 729AB • G. 723 • G. 726 • iLBC • Adaptive Jitter Buffer • Voice Activity Detection • Comfort Noise Generation • Echo Cancellation
Phone Keys	<ul style="list-style-type: none"> • 13 Function Keys: MENU, MUTE, SMS, HOLD, Volume+/- • 12 Dialing Buttons (0~9, *, #) • 8 Programmable Keys • 32 Multi-function Keys • 5 Navigate Key
Protocols	<ul style="list-style-type: none"> • SIP V2 (RFC 3261, 3262, 3263, 3264) • RTP/RTCP (RFC 1889 And RFC 1890) • NAPTR For SIP URI Lookup (RFC 2915) • STUN (RFC 3489) • SDP (RFC 2327) • ARP/RARP (RFC 826/903) • SNTP (RFC 2030) • TFTP/HTTP/HTTPS for Auto Provisioning • NS/DNS SRV (RFC 1706 And RFC 2782) • IEEE802. 1Q VLAN/802. 1p/DSCP • TR069 (TR104/TR098/TR111) • SNMPv2

Phone Feature	<ul style="list-style-type: none"> • Customized Ring Tone • SMS (100 Records) • Call History (100 Records) <ul style="list-style-type: none"> Most Recently Missed Calls Most Recently Received Calls Most Recently Dialed Numbers • Phone Book (500 Records)
Management	<ul style="list-style-type: none"> • Firmware Upgradeable • Web Management Interface • Password Management • Local and Remote Syslog (RFC 3164) • Auto Provisioning: TFTP, HTTP And HTTPS • SNTP Time Synchronization • Multi User Level • Support TR069 Management Mode • Support Flying FCMS Cloud Management
Call Features	<ul style="list-style-type: none"> • DTMF Relay: In-band, RFC 2833 and SIP info • Volume adjustment: Handset, Handfree, Speaker and Ring • Call Hold, Call Transfer And Call Waiting • CID And CWCID • Music ON Hold • MWI • 3 Way Conference • Auto Answer • Call Pickup • Full-duplex Speakerphone • Dial Rule • Hotline • Redial • Mute • Call Forward
Applications	<ul style="list-style-type: none"> • SMS Funcation • MAC Address Clone • SIP Proxy Redundancy • DHCP Server and DHCP Client • Support Mutil-Vlan • DNS SRV • Direct IP to IP Calling • IP Conflict Detection • Traversal By STUN • VPN: PPTP, I2TP and OpenVPN • Support DSCP and 802.1p QoS
Size and Weight	<ul style="list-style-type: none"> • 88mm(L) x85mm(W) x37mm(H) • 625g(N. W)

Place Order

Product Number	Description
FIP11W	2.8 inch wireless color phone
FIP11WP	2.8-inch wireless color phone, with PoE function