

FIP15G Plus

Elite Touch Screen IP Phone

Flyingvoice FIP15G Plus is a premium communication tool for executives and professionals who want to improve business efficiency. The phone adopts a brand-new quad-core processor and a 4.3-inch IPS touchable display to provide an intuitive interface and a better viewing experience for users. Featuring improved mobility features such as built-in dual-band Wi-Fi and Bluetooth, and dual USB ports, the FIP15G Plus allows you to effectively manage calls for easy remote collaboration. Moreover, it includes wideband Codec G.722 and Opus to ensure HD voice quality in every call for a better calling experience.



Eye-catching Screen, Intuitive to Use

With a 4.3-inch IPS touchable display, Flyingvoice FIP15G Plus provides a broad visual angle to check out information and images in full-color saturation, while delivers a concise user interface for easy operation.

HD Voice Quality, Better Calling Experience

The FIP15G Plus IP phone features advanced voice technologies such as Wideband Codec G.722, Opus, Acoustic Shield and ANC to block out annoying noises from the environment for superior voice quality. Based on a quad-core processor, the FIP15G can run faster and smoothly in any move, bringing more convenience to users.

Strong Wi-Fi Signal, Increased Mobility

Equipped with built-in 2.4GHz & 5 GHz Wi-Fi and Bluetooth, Flyingvoice FIP15G Plus not only supports high-quality calls with 5G Wi-Fi connectivity in any size building, but enables Bluetooth wireless headset, which allows you to move around when on a call, and no more missed calls when you leave your desk.

Dual USB ports, Expanded Functions

Dual USB ports for additional functions such as EHS10 headset adapters for DECT wireless headsets, USB earphones, or USB disks for call recording and more, giving you more customization in various usage scenarios.

Cloud Platforms, Easy Configuration

FIP15G Plus installed centralized firmware can be simple to deploy and manage by Flyingvoice's online platforms including FACS and FRPS, and auto-provisioning modes FTP/TFTP/HTTP/HTTPS/TR069, making mass deployment extremely easy.



- 4.3" 480*272px IPS touch screen
- 10 SIP accounts
- Built-in 2.4GHz & 5GHz Wi-Fi
- Built-in Bluetooth 4.2
- 2 x Gigabit Ethernet port
- Integrated PoE
- 2 x USB ports
- USB call recording(Auto/Manual)
- Support Intercom Video Linkage
- Supports wired/wireless headsets
- Wideband codec G.722, Opus
- Wall mountable

Audio Features

- > HD voice: HD handset, HD speaker
- > Wideband Codec: G.722, Opus, AMR-WB(Optional), G.711WB(Optional)
- > Narrowband Codec: G.711(A/u), iLBC, G.729A/B, G.723, G.723.1, G.726, AMR-NB(Optional)
- > DTMF: In-band, RFC 2833, SIP INFO
- > Full-duplex hands-free speakerphone
- > VAD, CNG, AEC, ANC, AGC, PLC, AJB, DRC

Phone Features

- > 10 SIP accounts
- > Mute, DND, auto answer, redial, speed dial, hotline
- > Call hold, call transfer (attended/blind), call waiting, call forward
- > SIP message
- > 6-way conferencing
- > Direct IP call without SIP proxy
- > Set date time manually or automatically
- > dial rules
- > XML browser, XML push
- > RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > IP conflict detection
- > Built-in Bluetooth 4.2(8k sampling rate)
- > Built-in 2.4GHz & 5GHz Wi-Fi
- > USB port (2.0 compliant) for:
 - USB headset
 - U flash drive call recording
 - EHS10 wireless headset adapter
 - PB01 emergency button
 - HB01 help button
 - P2EXP Expansion Module (Up to 3)
- > Support Intercom Video Linkage(i86, i1X Series)
- > Video Monitor (Support Third-Party IP Camera)

Directory

- > Phone book (2000 records, support Chinese search)
- > Black list
- > XML/LDAP remote phonebook
- > Phonebook search/import/export
- > Call history: all/missed/dialed/received/forwarded (800 records, 200*4)

IP-PBX Features

- > BLF
- > Anonymous call, anonymous call rejection
- > Call park, call pickup, voice mail
- > Paging, intercom, Message waiting indicator (MWI)
- > Call recording on server

Display and Indicator

- > 4.3" 480 x 272px color IPS screen with backlight
- > 16bit depth color
- > LED for call and message waiting indication
- > Dual-color (red/green) illuminated LEDs for line, status information
- > Intuitive user interface with icons and soft keys, wallpaper
- > 17 languages
- > Caller ID with name and number
- > Power saving mode

Feature Keys

- > Up to 27 (9*3) DSS key
- > Up to 64 Extended DSS Keys (Swipe)
- > 4 soft keys (touchable)
- > 3 features keys: headset, mute, hands-free speakerphone
- > Volume + / -

Interface

- > 2x RJ45 Ports (Ethernet 10/100/1000 Base-T)
- > Support PoE (IEEE 802.3af), class 3
- > 1 x RJ9 Handset port
- > 1 x RJ9 Headset port
- > 2 x USB 2.0 port (support expansion module)
- > 1 x Power adapter

Others

- > Color: Classic grey
- > Wall mountable
- > AC/DC Adapter
 - AC Input: 100~240V, 50~60Hz
 - DC Output: 5V, 2A
- > Power consumption (PSU): 1.8-6.2W
- > Power consumption (PoE): 3.5-9.2W
- > Dimension (W x H x D x T) :
 - 190mm x 188.5mm x 173mm x 42.5mm
- > Relative humidity: 10%~90% (No Condensing)
- > Storage temperature: -20~ 70°C
- > Operation temperature: 0~45°C

Management

- > Configuration: browser/phone/auto-provision
- > FTP/FTTP/HTTP/HTTPS for Auto Provisioning
- > Zero-configuration, TR069 (TR104/TR106)
- > FACS (Flyingvoice Auto-Configuration System)
- > Reset to factory, reboot
- > Package tracking
- > System logs viewing and downloading

Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT Traversal by STUN
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: Static IP and DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > SDP (RFC 2327), UDP/TCP
- > DSCP, 802.1p QoS, SRTP, TLS
- > HTTPS certificate manager
- > Digest authentication
- > OpenVPN
- > IEEE802.1X
- > IPv4 /IPv6, Dual stack IPv4/IPv6
- > PPPoE
- > RTP/RTCP (RFC 1889, RFC 1890)
- > ARP/RARP (RFC 826/903)
- > LLDP/CDP/DHCP VLAN
- > DNS/DNS SRV/DNS NAPTR
- > SSH

Package Contents

- > Flyingvoice FIP15G Plus IP Phone
- 1 x Handset with handset cord
- 1 x Ethernet cable
- 1 x Stand
- Quick start guide
- Power adapter (Optional)



Weight&Size

- > N.W/PCS: 0.77kg
- > G.W/PCS: 1.00kg
- > QTY/CTN:10, G.W/CTN: 10.90kg
- > Gift box size: 270mm x 195mm x 78mm
- > Carton size: 410mm x 410mm x 290mm

Certificated by



Compatible with

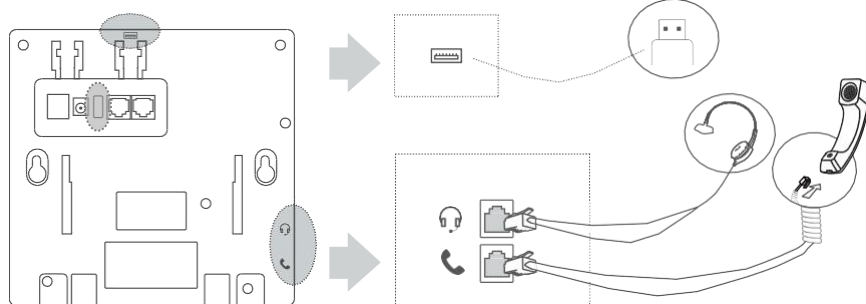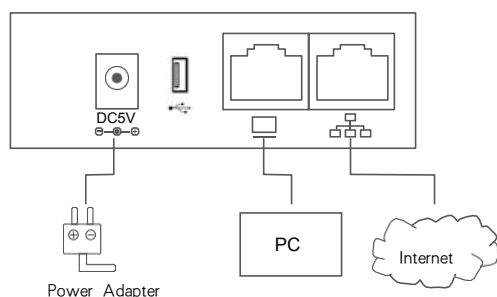

About FLYINGVOICE

Established in 2007, Flyingvoice is a global SME high-tech enterprise specializing in network communication terminal products. With research hubs strategically located in Bangkok, Hong Kong, and Shenzhen, and manufacturing facilities in Shenzhen and Vietnam, we ensure cutting-edge innovation and reliable production.

After more than 10 years of development, Flyingvoice has curated three product lines: IP Phones, POTS Replacement, and 5G FWA. Our mission is to provide SME customers with easily deployable and manageable network communication terminal products, along with voice and data communication solutions. We also offer the most comprehensive POTS Replacement solutions in the industry.

Flyingvoice products meet rigorous telecom-grade standards and are widely embraced by leading carriers globally. As of 2023, our POTS replacement products are favored by carriers in South Korea and North America, while IP Phones are extensively utilized in South Korea, India, and China. Notably, Flyingvoice's 5G FWA products have been mass deployed by carriers in China and India.

At the same time, Flyingvoice places great emphasis on supporting enterprise integration clients. With distribution and integration partners across major countries and regions worldwide, we've built a robust technical support system, guaranteeing efficient service delivery to our customers.

Copyright

Copyright © Flyingvoice Network Technology Co., Ltd. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Flyingvoice Network Technology Co., Ltd.

Technical Support

Visit www.flyingvoice.com for product documents and FAQ, or contact Flyingvoice by email at support@flyingvoice.com. We'll get you the help you need.



Flyingvoice Network Technology Co., Ltd.

Website: www.flyingvoice.com

Add: 1801-1802, Building 1, Chongwen Park, Nanshan Zhiyuan, Nanshan District, Shenzhen, China

Copyright © Flyingvoice Network Technology Co., Ltd. All Rights Reserved