


## 2 FXS Ports VoIP Adapter FTA5102



### Feature Keys

- 2 FXS Ports
- T.38 And T.30 FAX
- TR069,SNMP
- 10/100Mbps Ethernet

### Hardware Interface

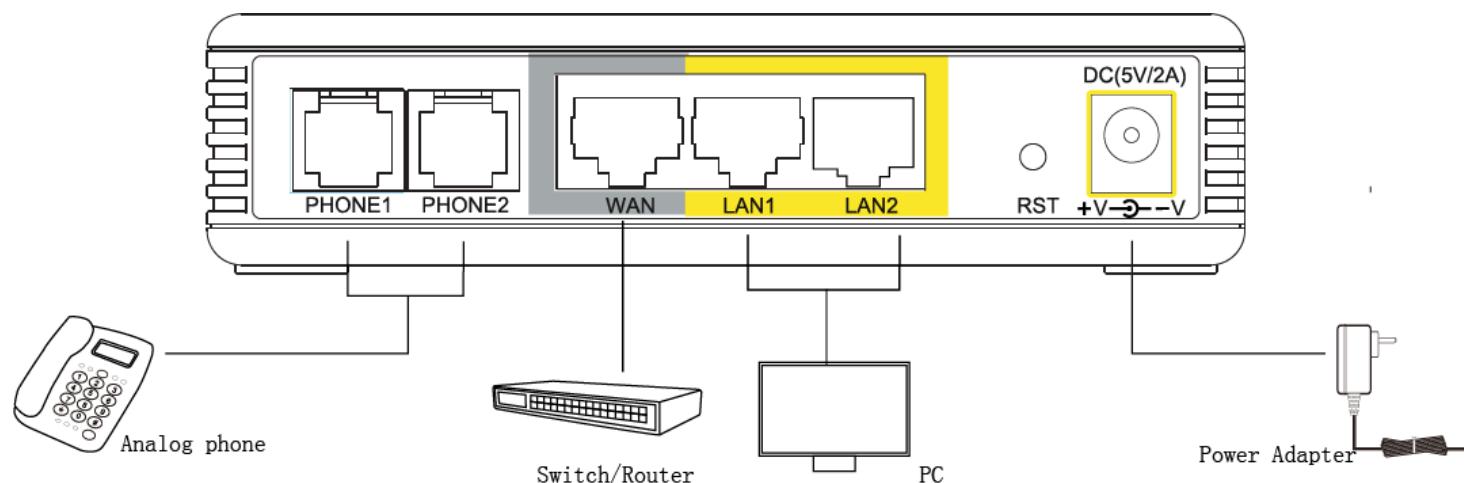

### Overview

FTA5102, which has two FXS port, one LAN port and one WAN port, is one of the most popular VoIP ATAs researched and produced by FlyingVoice. This product can not only provide two SIP lines for users to make calls, but also it is a wire-speed NAT router, make you enjoy easy network environment. What's more, FTA5102 support T.38 real time FAX and T.30 FAX with G.711. FTA5102 is a stand-alone device, which requires no PC to make Internet calls. This ATA guarantees clear and reliable voice quality on Internet, which is fully compatible with SIP industry standard and able to interoperate with many other SIP devices

and software on the market. The FTA5102, 2 FXS Analogue Telephone Adapter products in Flyingvoice, which enables customers to register to different SIP Proxy server, IP PBX and establish up to 2 concurrent VoIP calls for more flexibility in the voice communication. heir compact size, excellent voice quality, packed feature functionality and best-in-class price-performance point enable consumers to maximize the power of IP voice and data connectivity. FTA5102 is based on SIP V2.0 standard and compatibility with most service providers. It features 2 FXS telephone ports, the maximum cable lenght is more than 800m. TR069 CPE management & monitoring protocols and a base stand for vertical positioning.

# Technical Parameters

Power	<ul style="list-style-type: none"> <li>AC/DC Adapter</li> </ul> <p>AC Input: 100~245V, 50~60Hz</p> <p>DC Output: 12V, 1A</p>
Operating System	<ul style="list-style-type: none"> <li>Linux 2.6.36</li> </ul>
I/O Interfaces	<ul style="list-style-type: none"> <li>3 RJ-45 for 10/100Ethernet Ports</li> <li>2 RJ-11 for FXS Port</li> </ul>
Environmental	<ul style="list-style-type: none"> <li>Operation Temperature: 0~50 Degree C</li> <li>Storage Temperature: -25~ 85 Degree C</li> <li>Relative Humidity: 10%~90% No Condensing</li> </ul>
Audio Codec	<ul style="list-style-type: none"> <li>G.711(A/u)</li> <li>G.729A/AB</li> <li>G.726-32</li> <li>OPUS standard</li> <li>T.30 FAX with G.711</li> <li>Real time FAX over IP via T.38 (up to 14.4Kbps Pass-through)</li> <li>Adaptive Jitter Buffer</li> <li>Voice Activity Detection</li> <li>Hook Flash</li> <li>Comfort Noise Generation</li> <li>Echo Cancellation</li> </ul>
Management	<ul style="list-style-type: none"> <li>Firmware Upgradeable</li> <li>Web Management Interface</li> <li>IVR-driven Management Interface</li> <li>Local and Remote Syslog (RFC3164)</li> <li>Auto Provisioning</li> <li>SNTP Time Synchronization</li> <li>Multi User Level</li> <li>Support IPv4, IPv6</li> <li>SNMPv1/v2/v3</li> <li>TR069</li> <li>FCMS cloud server</li> </ul>
Protocols	<ul style="list-style-type: none"> <li>SIP V2 (RFC3261,RFC3262,RFC3263,RFC3264,RFC3265,RFC3515,RFC3891,RFC3892,3GPP,IMS)</li> <li>Backward compatible with RFC2543</li> <li>Session timer (RFC4028)</li> <li>SDP (RFC2327)</li> <li>RTP/RTCP (RFC1889/RFC1890)</li> <li>UDP/TCP/TLS</li> <li>IPv4/ IPv6</li> <li>Support Dual Stack (IPv4 and IPv6)</li> <li>NAPTR for SIP URI lookup (RFC2915)</li> <li>STUN (RFC 3489)</li> <li>ARP/RARP (RFC 826/903)</li> <li>SNTP (RFC2030)</li> </ul>

	<ul style="list-style-type: none"> <li>• DHCP/IPv4 /PPPoE</li> <li>• PPTP/L2TP VPN</li> <li>• HTTP Server for Web Management</li> <li>• TFTP/HTTP/HTTPS for Auto Provisioning</li> <li>• Message Waiting Indicator (RFC3842)</li> <li>• DHCP Option Codes for SIP (RFC3361)</li> <li>• DNS/DNS SRV (RFC1706 and RFC 2782)</li> <li>• VLAN mode: Voice/ Management VLANs, support VLAN 802.1p/ 802.1Q</li> </ul>
Applications	<ul style="list-style-type: none"> <li>• NAT/NAPT Router function</li> <li>• MAC Address Clone</li> <li>• DHCP Server</li> <li>• PPTP/L2TP VPN</li> <li>• PPoE</li> <li>• SIP proxy redundancy</li> <li>• Dynamic via DNS SRV, A records</li> <li>• NAT Traversal by STUN</li> <li>• DMZ</li> <li>• QoS with Layer 3, Traffic shaping</li> <li>• DHCP Client and DHCP Server</li> <li>• IP conflict detection</li> </ul>
Call Features	<ul style="list-style-type: none"> <li>• 3-way Conference</li> <li>• Music on hold</li> <li>• Dial mode: DTMF and Pulse</li> <li>• DTMF mode: In-band, RFC2833 and SIP INFO</li> <li>• Call Hold</li> <li>• Call Forwarding</li> <li>• Call Mute</li> <li>• Call Transfer</li> <li>• Call Waiting</li> <li>• Speed Dial</li> <li>• Caller ID (Bellcore/DTMF/FSK) and CWCID</li> <li>• Hotline</li> <li>• Real time fax over IP via T.38</li> <li>• T.30 FAX with G.711</li> <li>• Dial Plan</li> <li>• Black List</li> <li>• Call Log</li> </ul>
SIZE And Weight	<ul style="list-style-type: none"> <li>• 120mm(L)x80mm(W)x32.5mm(H)</li> <li>• 119g(N.W)</li> </ul>